


## HD & HO SERIES

1% & 2% NIST, or Standard 2%, 3%, or 5%

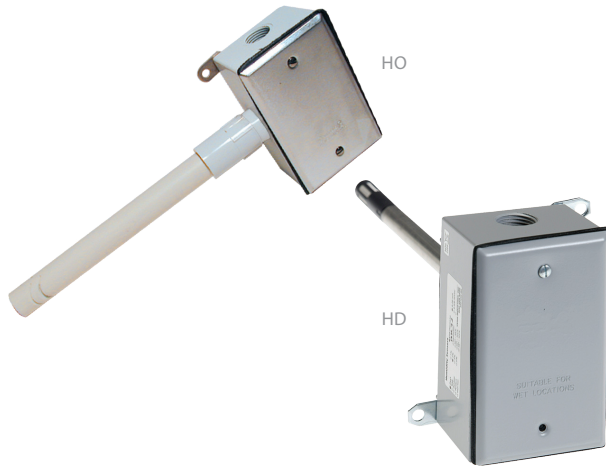

HD and HO Series deluxe humidity transmitters provide an ideal solution for measuring relative humidity in a wide range of conditions. All devices are equipped with a thin-film capacitive sensor that is easily replaceable in the field. These sensors are calibrated to NIST standards, with certificates available (see Ordering Information; choose "N" in NIST block). Temperature sensing options are also available. The duct mounted HD is encased in a die cast metal housing for extra strength. The outdoor HO housing is completely weather proof – the most rugged sensor available. All deluxe HD and HO models come with a standard five-year warranty.†

### SPECIFICATIONS

INPUT POWER	
Voltage Model*	Class 2; 12 to 30 Vdc/24 Vac, 15 mA max.
mA Model	Class 2; Loop powered 12 to 30 Vdc only, 30 mA max.
OUTPUT	
Voltage Model	3-wire, observe polarity
mA Model	2-wire, not polarity sensitive (clipped and capped)
HUMIDITY	
HS Element††	Digitally profiled thin-film capacitive (32-bit mathematics) U.S. Patent 5,844,138
Accuracy at 25°C from 10-80% RH** (Multi-point calibration, NIST traceable)	HD only: ±1% at 20 to 40% RH in mA output mode; (multi-point calibration, NIST traceable) All models: 2%, 3%, or 5% (specify)
Temperature Effect, Duct Model	±0.1% RH/°C above or below 25 °C (typical)
Temperature Effect, Outdoor Model	4 to 20 mA version: (0.0013x%RHx(T°C-25)); 0-5V/0-10V versions: (0.0015x%RHx(T°C-25)) – (%RHx0.0008xabs(T°C-25))
Scaling	0 to 100% RH
Hysteresis	1.5% typical
Linearity	Included in accuracy spec.
Reset Rate***	24 hours
Stability	±1%@20 °C (68 °F) annually, for two years

### Sensor element

Thin-film capacitive sensor element recovers from 100% saturation

### Accuracy

Fully interchangeable element to 1%, 2%, 3%, or 5% accuracy...no calibration

### Field replacable

Replace element in the field... maintain accuracy and minimize downtime

### APPLICATIONS

- Controlling HVAC systems for improved comfort and energy savings
- Museums, schools, printing shops, and other locations requiring humidity control
- Facilitating compliance with ASHRAE standards for environmental control and indoor air quality

### Easy servicing

Duct sensor element can be serviced without disturbing conduit

### Potted circuitry

Prevents costly condensate shorts

### Flexibility

Polarity insensitive, two-wire 4 to 20 mA or 3-wire 0-5/0-10 Vdc versions...flexible systems compatibility...save time in the field, stock fewer devices

### TEMPERATURE

Optional Temp. Transmitter Output	Digital, 4 to 20 mA (clipped & capped) or 0-5/0-10 V output
HO Transmitter Accuracy	±1.3 °C (±2.3 °F) typical;
HD Transmitter Accuracy	±0.5 °C (1.0 °F) typical

### OPERATING ENVIRONMENT

Operating Humidity Range	0 to 100% RH non-condensing
Operating Temp. Range	-40 to 50 °C (-40 to 122 °F)

### WARRANTY

Limited Warranty	5 years †
------------------	-----------

### AGENCY APPROVALS



† All deluxe models come with a standard five-year warranty. The HS sensing element has a 1-year warranty. The element is not a part of the 5-year product warranty.

†† The CE mark indicates RoHS2 compliance. Please refer to the CE Declaration of Conformity for additional details.

\* One side of transformer secondary is connected to signal common, so an Isolation transformer or dedicated power supply may be required.

\*\* Specified accuracy with 24 Vdc supplied power with rising humidity. RTD/Thermistors are not compensated for internal heating of product.

\*\*\* Reset Rate is the time required to recover to 50% RH after exposure to 90% RH for 24 hours.

Shielded cabling is required for conformance to EMC standards. Technical information is available from the factory upon request or from the Veris website at [www.veris.com](http://www.veris.com). EMC Conformance - CE Option: Low Voltage Directive 2014/35/EU and EMC Directive 2014/30/EU.

EMC note: Connect this product to a DC distribution network or an AC/DC power adaptor with proper surge protection (EN 61000-6-1 specification requirements).



